



Engineering Service Made to Order items




Special Sleeves

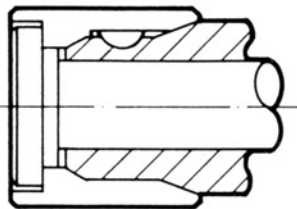


Flush half length.

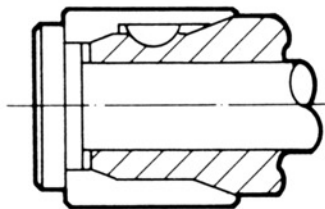

Standard half length

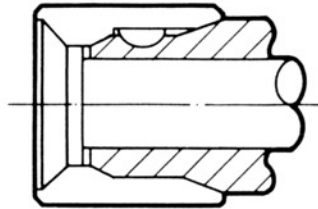

Pressure angle.

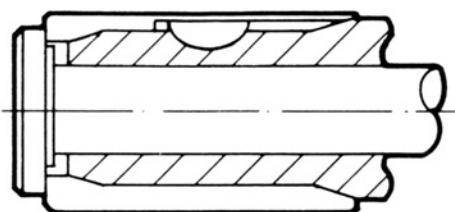


Extended length.


Also:

- SERRATED GRIP
- SPLINED-P.C.D. LOCATION
- SEGMENTED
- BLADE / JAW TYPE
- C9 - CANTILEVER


End Locators

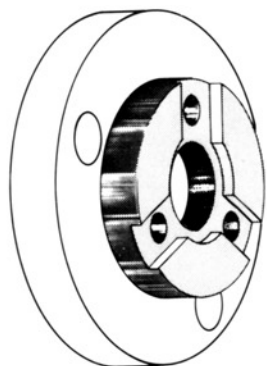

Standard
3 point

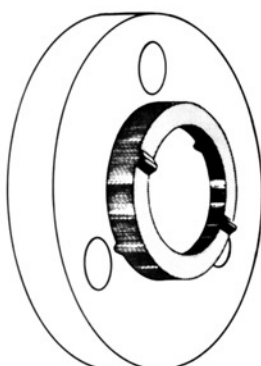


Wobble
Type

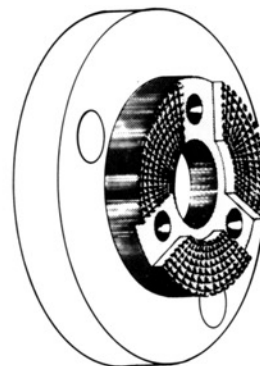


Driving
Type

Spindle/Mandrel Adaptor Plates

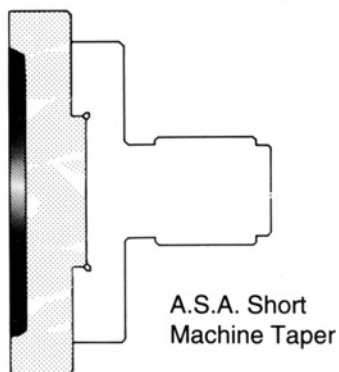


A.S.A. Short
Machine Taper

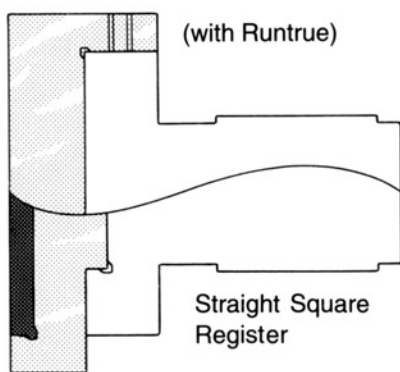

(with Runtrue)

Straight Square
Register

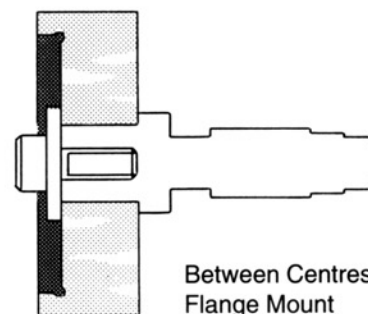

Between Centres
Flange Mount