


Ferromax

Circular permanent magnetic chucks for grinding and turning

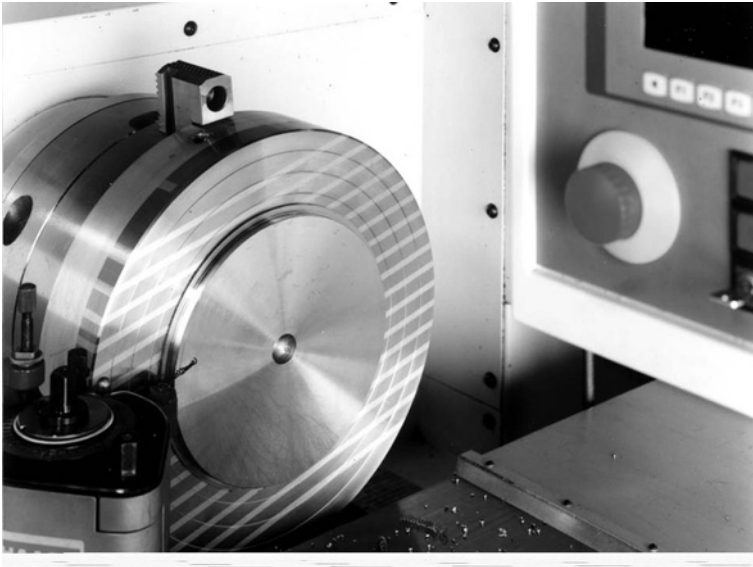

Due to the stability and superior holding power the rotary permanent magnetic chucks Ferromax are particularly suited for use on lathes, grinders, indexing and marking out devices

- Highest holding force
- Precision construction with silver brazed topplate
- Variable holding power with smooth actuation
- Concentric grooves in the topplate for workpiece centring
- Also available: auxiliary top plates

Code	Diameter	Height	Pitch Diameter	Mounting-holes	Weight[kg]
31.00.155	155	70	142	4 x M8	7
31.00.203	200	78	182	4 x M8	12
31.00.253	250	78	232	4 x M8	17
31.00.303	300	78	285	4 x M8	27
31.00.353	350	78	334	4 x M8	40
31.00.403	400	78	375	6 x M10	56
31.00.450	450	102	400	6 x M10	78
31.00.500	500	102	450	6 x M10	85
31.00.600	600	100	550	6 x M10	125
31.00.700	700				
31.00.800	800	110	780		253
31.00.900	900				