


Ferrostar

Circular permanent magnetic chucks

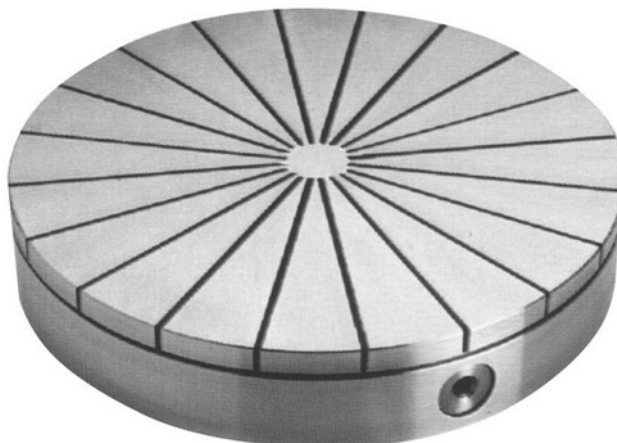

- Grinding and truning applications
- Best suited for ring shaped components
- Through centre bore can be accomodated
- Execution with pole shoes for special set-ups
- Also available: auxiliary top plates

Code	Diameter	Height	Pitch DiameterA	Pitch DiameterB	Mounting-holes	Poler	Weight
32.00.913	130	58	-	100	4 x M6	8	5.7
32.00.915	150	54	120	80	2 x 4 x M6	10	6.5
32.00.920	200	58	180	110	2 x 4 x M6	14	13
32.00.925	250	59	220	140	2 x 4 x M6	14	20
32.00.930	300	59	260	180	2 x 4 x M8	18	30
32.00.935	350	71	300	220	2 x 4 x M8	18	49
32.00.940	400	80	340	260	2 x 4 x M8	18	75
32.00.945	450	80	340	260	2 x 4 x M8	20	96
32.00.950	500	80	400	300	2 x 4 x M8	24	119
32.00.960	600	80	450	350	2 x 4 x M8	30	172
32.00.970	700	82	500	400	2 x 4 x M8	36	234
32.00.980	800	85	700	400	2 x 4 x M10	40	300